


TANK




TANK -V

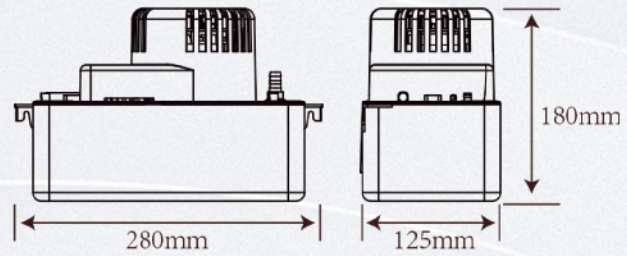

Tank capacity: 2.2L




TANK -L

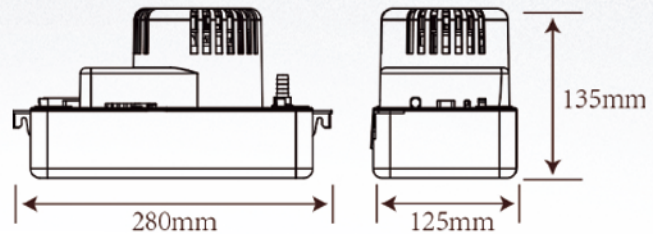

Tank capacity: 1.1L

Model	RTP20WS230V	RTP20WS230L
Voltage(V)	230	
Frequency(HZ)	50/60	
Current(A)	0.7/0.55	
Power(W)	85/75	
0.3m(L/H)	260/303	
Water flow rate at 1.5m(L/H)	230/265	
2.7m(L/H)	180/208	
Discharge head	17'/5.2M	

RTP20

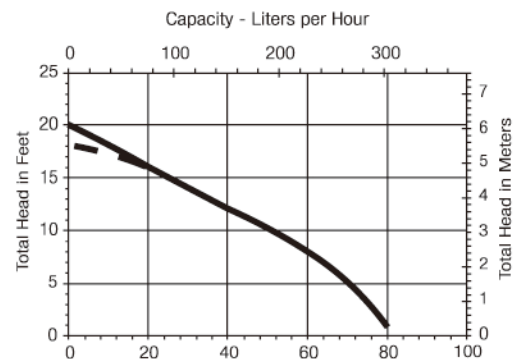

Model: Ref-RTP20WS230-V

- Application: SUITABLE FOR HIGH-EFFICIENCY GAS FURNACES
- Features:
 - New Generation Float Arm For Enhanced Reliability
 - Compact Design for Easy Installation
 - 3 Inlet Drain Holes
 - Automatic Snap-Action Switch
 - 1/2 Gallon Rustproof, High Impact ABS Tank
 - Removable 3/8" Barbed Check Valve
 - 6' Cord with 3-Pronged Plug
 - Thermal Overload Protection
- Performance Data: Refer to Photo
- Products Specification

Model: Ref-RTP20WS230-L

- Application: SUITABLE FOR HIGH-EFFICIENCY GAS FURNACES
- Features:
 - New Generation Float Arm For Enhanced Reliability
 - Compact Design for Easy Installation
 - 3 Inlet Drain Holes
 - Automatic Snap-Action Switch
 - 1/4 Gallon Rustproof, High Impact ABS Tank
 - Removable 3/8" Barbed Check Valve
 - 6' Cord with 3-Pronged Plug
 - Thermal Overload Protection
- Performance Data: Refer to Photo
- Products Specification